Forsstrom



# **TD-Ceiling**

200/400

**Power** 5/10 kW

Max weld surface 200/400 cm<sup>2</sup>

Max weldable electrode width

Free space behind electrode 820 mm

Daylight (with 45 mm tall electrode) 80 mm


Power requirement - max/hour 2.9/5.8 kW/h

Main fuse - type D 32 A

Working frequency 27.12 MHz



### Forsstrom

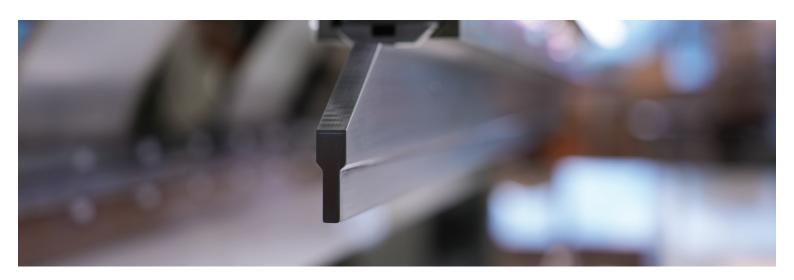

## **Operating system and Software**

Operating system

The operating system is developed by Forsstrom programmers and sales representatives with experience in the field. It is a system developed for welders by welders. The computer features a 12" touch screen. Software

Forsstrom iQ is designed to monitor and analyze users' HF/RF welding department. Powerful reporting tools allow quick identification of weak points and bottlenecks resulting in optimal usage of production capacities.



### **Extras**

**Computer and Software** Data transfer program Travel programs Control programs Material positioning Band holder Magnet system Vacuum system Laser lines Welding tools Electrodes Impulse welding unit Tube-closing tools Supplementary tool Other Cooling Welding table



forsstrom.com/machine/td-ceiling-200-400

# Learn more about the benefits of having the Forsstrom TD-Ceiling as part of your production.

Call or email Forsstrom sales: Tel: +46 523 66 66 00 sales@forsstrom.com

All machines are manufactured on order according to customer specification. We make sure it is equipped to make your production as efficient as possible.