TX-Mega

400

Power
10 kW

Max weld surface
400 cm²

Max weldable electrode width
450 mm

Free space behind electrode
880 mm

Daylight (with 45 mm tall electrode)
75 mm

Power requirement - max/hour
5.8 kW/h

Main fuse - type D
32 A

Working frequency
27.12 MHz

500

Power
12 kW

Max weld surface
500 cm²

Max weldable electrode width
450 mm

Free space behind electrode
880 mm

Daylight (with 45 mm tall electrode)
75 mm

Power requirement - max/hour
6.2 kW/h

Main fuse - type D
32 A

Working frequency
27.12 MHz

650

Power
16 kW

Max weld surface
650 cm²

Max weldable electrode width
450 mm

Free space behind electrode
880 mm

Daylight (with 45 mm tall electrode)
75 mm

Power requirement - max/hour
6.9 kW/h

Main fuse - type D
63 A

Working frequency
27.12 MHz

800

Power
20 kW

Max weld surface
800 cm²

Max weldable electrode width
450 mm

Free space behind electrode
880 mm

Daylight (with 45 mm tall electrode)
75 mm

Power requirement - max/hour
7.6 kW/h

Main fuse - type D
63 A

Working frequency
27.12 MHz

Operating system and Software

Operating system
The operating system is developed by Forsstrom programmers and sales representatives with experience in the field. It is a system developed for welders by welders. The computer features a 12" touch screen.

Software
Forsstrom iQ is designed to monitor and analyze users' HF/RF welding department. Powerful reporting tools allow quick identification of weak points and bottlenecks resulting in optimal usage of production capacities.

Extras

Computer and Software
Data transfer program
Travel programs
Control programs

Material positioning
Band holder
Magnet system
Vacuum system
Laser lines

Welding tools
Electrodes
Impulse welding unit
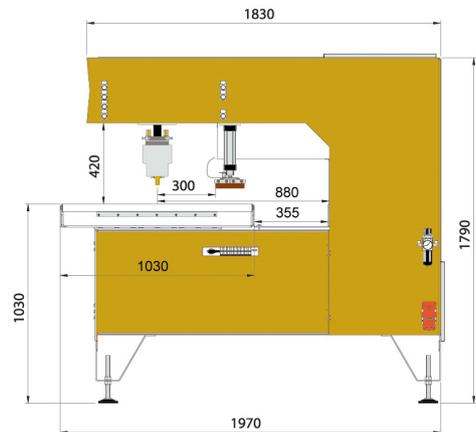Tube-closing tools
Supplementary tool

Other
Cooling
Welding table

Dimensions

Front

Side

Learn more about the benefits of having the Forsstrom TX-Mega as part of your production.

Call or email Forsstrom sales:
Tel: +46 523 66 66 61
sales@forsstrom.com

forsstrom.com/machine/tx-mega-400-800