



XP

80

Power
2 kW

Max weld surface
80 cm²

Max weldable electrode width
200 mm

Free space behind electrode
750 mm

Daylight (with 45 mm tall electrode)
75 mm

Power requirement - max/hour
2.9 kW/h

Main fuse - type D
32 A

Working frequency
27.12 MHz

120

Power
3 kW

Max weld surface
120 cm²

Max weldable electrode width
200 mm

Free space behind electrode
750 mm

Daylight (with 45 mm tall electrode)
75 mm

Power requirement - max/hour
5.8 kW/h

Main fuse - type D
32 A

Working frequency
27.12 MHz

200

Power
5 kW

Max weld surface
200 cm²

Max weldable electrode width
200 mm

Free space behind electrode
750 mm

Daylight (with 45 mm tall electrode)
75 mm

Power requirement - max/hour
6.2 kW/h

Main fuse - type D
32 A

Working frequency
27.12 MHz





Operating system and Software

Operating system

The operating system is developed by Forsstrom programmers and sales representatives with experience in the field. It is a system developed for welders by welders. The computer features a 12" touch screen.

Software

Forsstrom iQ is designed to monitor and analyze users' HF/RF welding department. Powerful reporting tools allow quick identification of weak points and bottlenecks resulting in optimal usage of production capacities.

Extras

Computer and Software
Data transfer program
Travel programs
Control programs


Material positioning
Band holder
Magnet system
Vacuum system
Laser lines

Welding tools
Electrodes
Impulse welding unit
Tube-closing tools
Supplementary tool


Other
Cooling
Welding table

Dimensions

Front

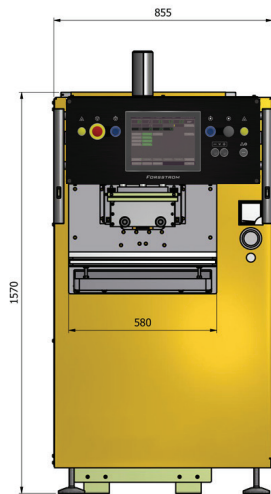

Side

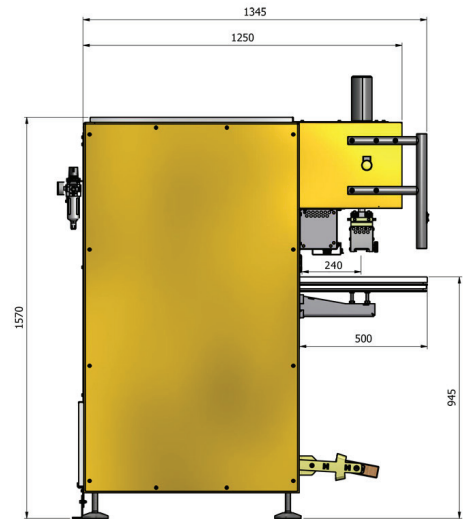

forsstrom.com/machine/xp-80-120

Learn more about the benefits of having the Forsstrom XP as part of your production.

Call or email Forsstrom sales:
Tel: +46 523 66 66 00
sales@forsstrom.com

All machines are manufactured on order according to customer specification. We make sure it is equipped to make your production as efficient as possible.