Forsstrom



CP9

New and Improved


Eyelet change

The CP9 features a redesigned eyelet change mechanism for effortless operation. Backed by Forsstrom's service team, the CP9 sets a new standard in reliability and performance.

HF Generator

The FG 120 is a small 3kW HF-generator with built-in control system for controlling welding parameters. It is suitable as a stand-alone unit for eyelet welding.

Electrodes for eyelets

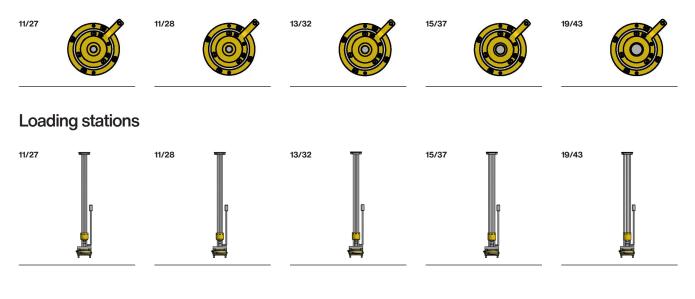



Forsstrom



Technical specifications

Standard voltage 230 VAC	Fuse max 13 A
Frequency 50 Hz	Pressure 6.4-10 bar
Max electricity consumption 1 A	Litre air per minute 25 I/m
Working Frequency 27.12 MHz	
Dimensions	
Front	Side



C-C 300

340

450

forsstrom.com/machine/cp9

Learn more about the benefits of having the Forsstrom x Carmo CP9 as part of your production.

139

Ø10 (4x)---C-C 344

670

592

Call or email Forsstrom sales: Tel: +46 523 66 66 00 sales@forsstrom.com

All machines are manufactured on order according to customer specification. We make sure it is equipped to make your production as efficient as possible.

760

555